

Amarr Energy Efficient Polyurethane Insulated Sectional Doors



Performance Tested Doors to Meet All Your Needs





Amarr polyurethane insulated products are our top-of-the-line energy efficient doors with verified thermal performance U-factor ratings; constructed using HCFC-free polyurethane insulation to create a strong monolithic panel.





Amarr® 2743 3" 27-ga SUPER-DUTY

Superior Energy Efficiency
Exceptional performance for long-term value





Amarr® 2042 2" 20-ga EXTRA HEAVY-DUTY

High Energy Efficiency
Flush modern look





Amarr® 2442 2" 24-ga HEAVY-DUTY

High Energy Efficiency
Flush modern look





Amarr® 2742 2" 27-ga HEAVY-DUTY

High Energy Efficiency
Pencil groove design for added strength





Amarr® 2741 1-3/8" 27-ga MEDIUM-DUTY

Energy Efficient
Competitively priced



Amarr® 2747 1-5/8" 27-ga HEAVY-DUTY


Versatile Replacement Section
Compatible with other manufacturer's shiplap doors






Amarr 2042 with 3 Clear Anodize Aluminum Full View sections (custom painted by owner).


PANEL DESIGNS



AMARR 2042 and 2442:
FLUSH PANEL



AMARR 2743, 2742, and 2741:
PENCIL GROOVE



AMARR 2747:
WIDE GROOVE

STEEL COLORS



TRUE WHITE (TW)



SANDTONE (ST)



COMMERCIAL
GRAY (CY)



COMMERCIAL
BROWN (CB)



BLACK (BL)
Amarr 2743, 2442,
2742 and 2741 only



Amarr Color Zone
800+ factory-applied colors.
Price upcharge applies.

Amarr 2042 available in True White only.
Amarr 2442 available in True White and Black only.

WINDOW OPTIONS



26"x13" DOUBLE INSULATED
ACRYLIC WINDOWS
with BLACK FRAME

Not available for Amarr 2743



24"x12" TEMPERED
INSULATED GLASS with
BLACK or WHITE FRAME

Not available for Amarr 2747



24"x8" TEMPERED INSULATED
with BLACK FRAME



24"x6" DOUBLE INSULATED
ACRYLIC WINDOWS
with BLACK FRAME

Not available for
Amarr 2743 & 2747



41"x13" POLYCARBONATE WINDOW with
BLACK or WHITE ALUMINUM FRAME


Available for Amarr 2442 only

Repair Any 1-5/8" Shiplap Door with Amarr 2747

- Compatible section profile
- Similar exterior and interior groove designs
- Comparable section weights requires no spring change



Air Infiltration Performance

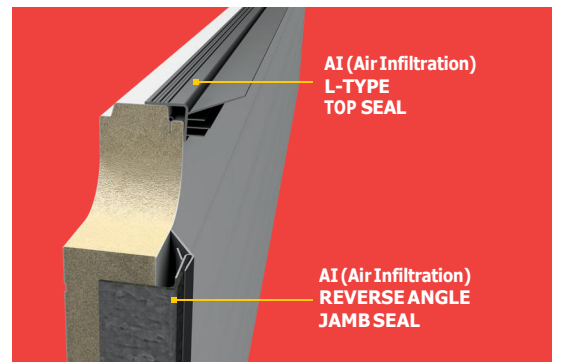

- Meets Building Energy Efficiency Standards:
ASHRAE 90.1
IECC®
CA Title 24
- 3rd party certification tested
- Certification available for
Amarr 2743, 2042, 2442, 2742 & 2741

Both seals plus 1" of jamb overlap required to meet the above standards; other conditions may apply.

Thermal Performance



Amarr participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.



This symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.




Amarr 2042, 2442, and 2742 Options


ALUMINUM SECTION



GLAZED ALUMINUM



PERFORATED ALUMINUM
0.312" square perforations on 1/2" centers



LOUVERED ALUMINUM
6 columns of (12) 3"x 3/4" vents on a 4'x 24" panel



CLEAR ANODIZE



DARK BRONZE ANODIZE



BLACK ANODIZE



WHITE POWDER COAT

Actual color may vary from samples.

SUPERFLEX IMPACT SECTION



SuperFlex sections flex in & out 8"-10". High-performance TPO skins on a flexible fiberglass tube frame helps minimize lower door section damage commonly found in today's busy warehouses.

PASS DOOR with stainless steel frame



Available in door sizes up to 16'2" wide x 16' tall. Wind load option not available.

Polyurethane Insulated Steel Doors Specifications

SPECIFICATIONS

| | Super-Duty Amarr 2743 | Extra Heavy-Duty Amarr 2042 | Heavy-Duty Amarr 2442 | Heavy-Duty Amarr 2742 | Heavy-Duty Amarr 2747 | Medium-Duty Amarr 2741 |
|--|---------------------------------|---------------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------|
| DOOR THICKNESS | 3" (7.6 cm) | 2" (5.1 cm) | 2" (5.1 cm) | 2" (5.1 cm) | 1-5/8" (4.1 cm) | 1-3/8" (3.5 cm) |
| PROFILE DESIGN | Tongue and Groove | Tongue and Groove | Tongue and Groove | Tongue and Groove | Shiplap | Tongue and Groove |
| EXTERIOR STEEL THICKNESS | 27 ga | 20 ga | 24 ga | 27 ga | 27 ga | 27 ga |
| PANEL DESIGN | Pencil Groove | Flush | Flush | Pencil Groove | Wide Groove | Pencil Groove |
| STEEL EMBOSSEMENT | Stucco | Stucco | Stucco | Stucco | Stucco | Stucco |
| CONSTRUCTION LAYERS | Triple | Triple | Triple | Triple | Triple | Triple |
| INSULATION ¹ | Polyurethane | Polyurethane | Polyurethane | Polyurethane | Polyurethane | Polyurethane |
| U-FACTOR | 0.17 | 0.19 | 0.19 | 0.19 | 0.20 | 0.21 |
| R-VALUE ² | 28.0 | 19.4 | 19.4 | 19.4 | 15.1 | 14.5 |
| AIR INFILTRATION OPTION ³ | • | • | • | • | • | • |
| HINGE REINFORCEMENT | Continuous Strip | Continuous Strip | Continuous Strip | Continuous Strip | Continuous Strip | Continuous Strip |
| BOTTOM WEATHER SEAL (Co-Extruded PVC) | Triple Contact | Dual Contact | Dual Contact | Dual Contact | Triple Contact | Dual Contact |
| DOOR WIDTH MIN | 5' | 5' | 5' | 5' | 5' | 5' |
| DOOR WIDTH MAX | 32' 2"* | 32' 2"* | 32' 2"* | 32' 2"* | 24' 2" | 20' 2" |
| DOOR HEIGHT MIN | 7' | 7' | 7' | 7' | 7' | 7' |
| DOOR HEIGHT MAX | 26' 1"* | 26' 1"* | 26' 1"* | 26' 1"* | 26' 1" | 16' 1" |
| PASS DOOR | | • | • | • | | |
| ALUMINUM SECTIONS | | • | • | • | | |
| WIND LOAD ³ AVAILABLE | • | • | • | • | | • |
| PAINT FINISH WARRANTY ⁴ | 10 Years | 10 Years | 10 Years | 10 Years | 10 Years | 10 Years |
| WORKMANSHIP/HARDWARE WARRANTY ⁴ | 1 Year | 1 Year | 1 Year | 1 Year | 1 Year | 1 Year |

Track: All Amarr doors are available with both 2" or 3" track in Standard Lift, High Lift, Vertical Lift, Rapid Install Vertical Lift, Low Headroom, and Follow the Roof Pitch. Custom track configurations are also available. For drawings and more information, please visit www.amarr.com.



Rapid Install Vertical Lift: Designed specifically for commercial warehouse and dock doors and saves approximately 20 minutes of installation time per door due to fewer jamb attachments and pre-assembled, one-piece track. Available for door sizes up to 9'4"x10'. For more information, please visit www.amarr.com.

Springs: Torsion springs are oil tempered, helical wound and custom computed for each door for a minimum 10,000 cycle life. Optional springs are available up to 100,000 cycle life.

Standard Hardware: Galvanized steel hinges and track brackets. All rollers have minimum 10-ball bearings.



Verified thermal performance rating per DASMA Thermal Performance Verification Program.

- Insulation has passed self-ignition, flamespread and smoke developed index fire testing.
- Calculated door section R-value is in accordance with DASMA TDS-163.
- It is your responsibility to make sure your garage door meets local building codes.
- For complete warranty details, visit amarr.com or contact your local Amarr dealer.
- Meets building code compliance for ASHRAE® 90.1, IECC® and CA Title 24 with optional seals.

* Available door width and height depends on total door weight. Total door weight cannot exceed 635 lbs for 2" track or 2200 lbs for 3" track.

Our Philosophy. Since 1951, we have successfully raised the standards of quality, value, and dependability in the garage door industry. Today, with the same promise of individual attention and great value for all our customers, we remain committed to offering Amarr products and services that raise those standards even higher.

